

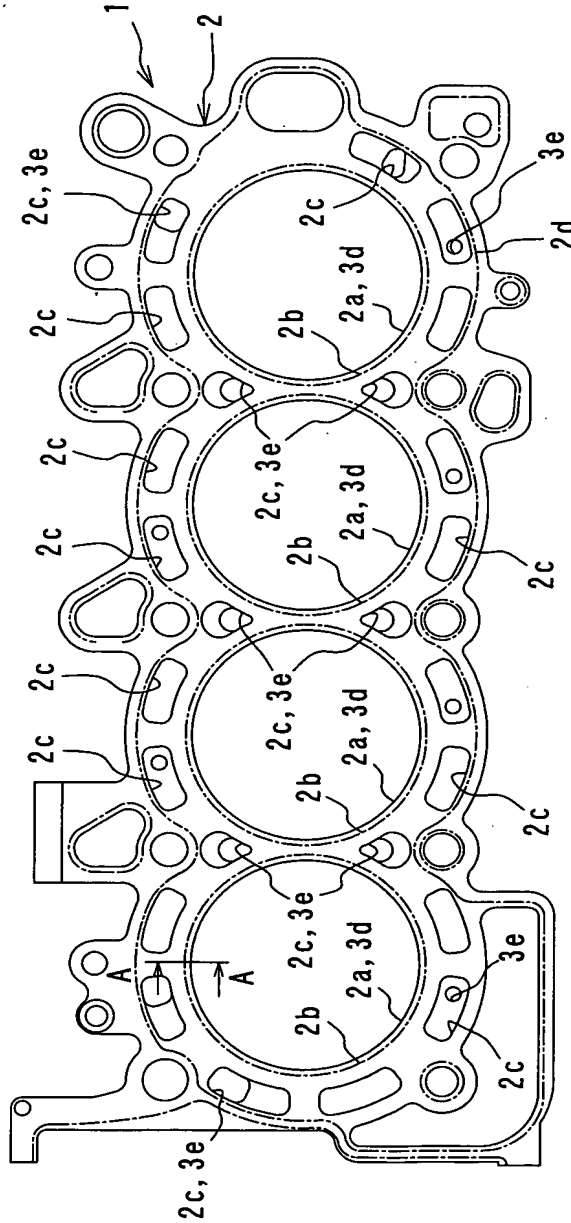


FIG. 1

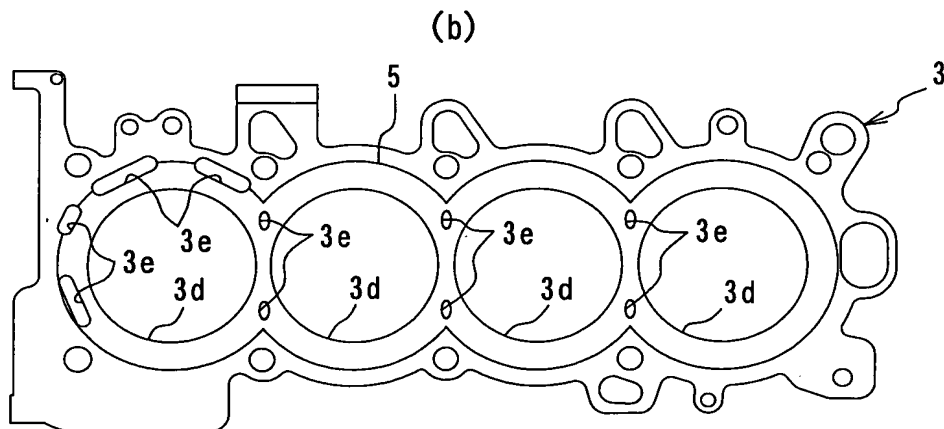

3 / 2 5

FIG. 3

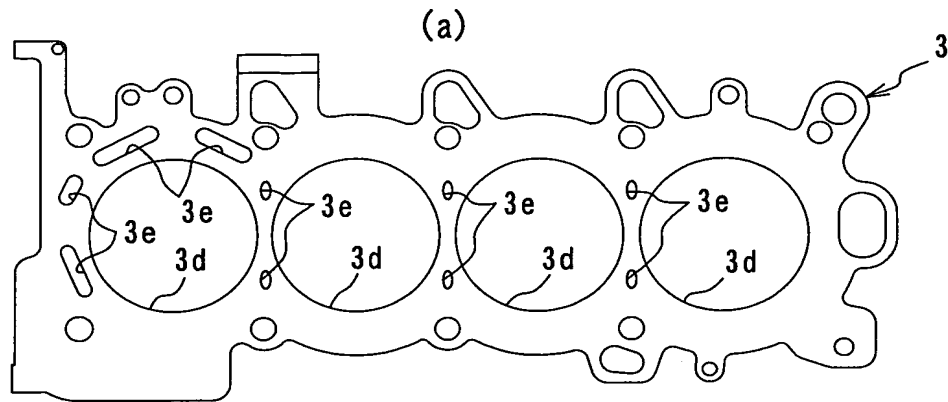

4 / 2 5

FIG. 4


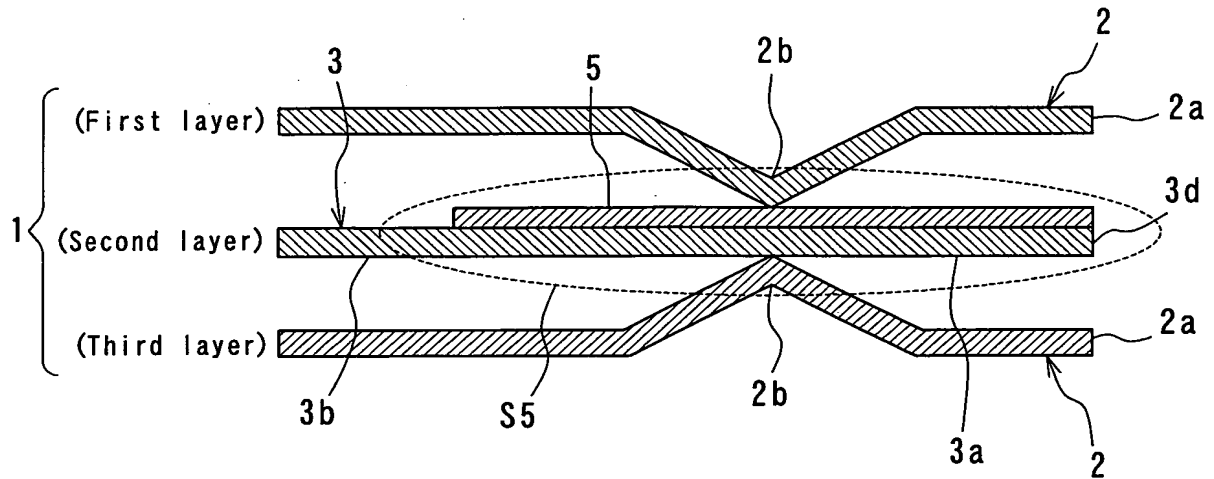


FIG. 5

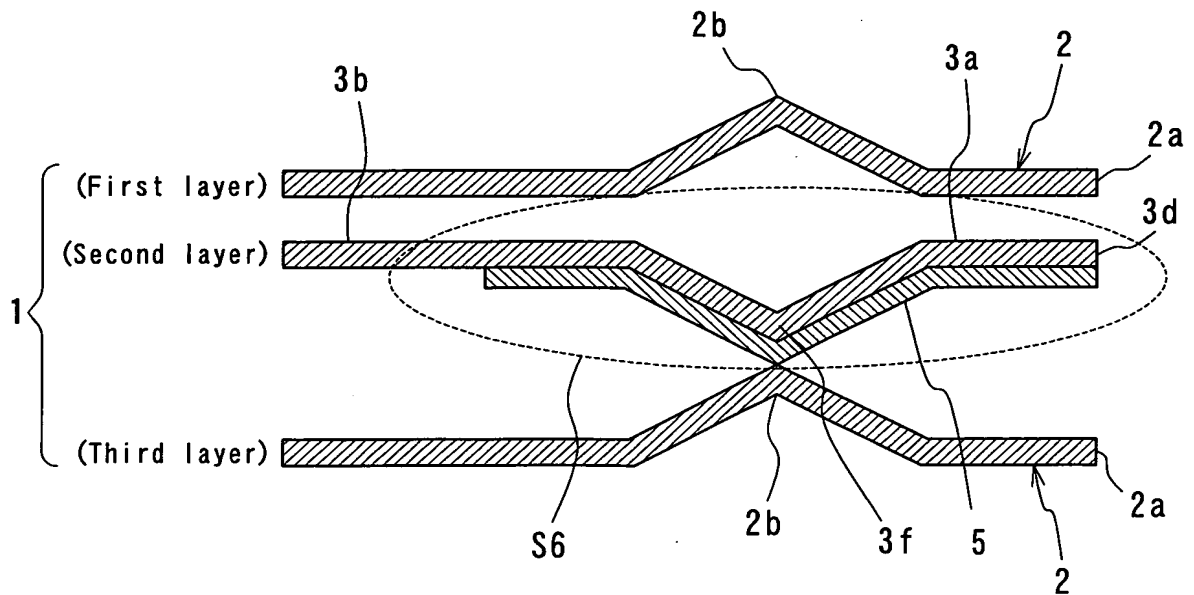

5 / 2 5

FIG. 6


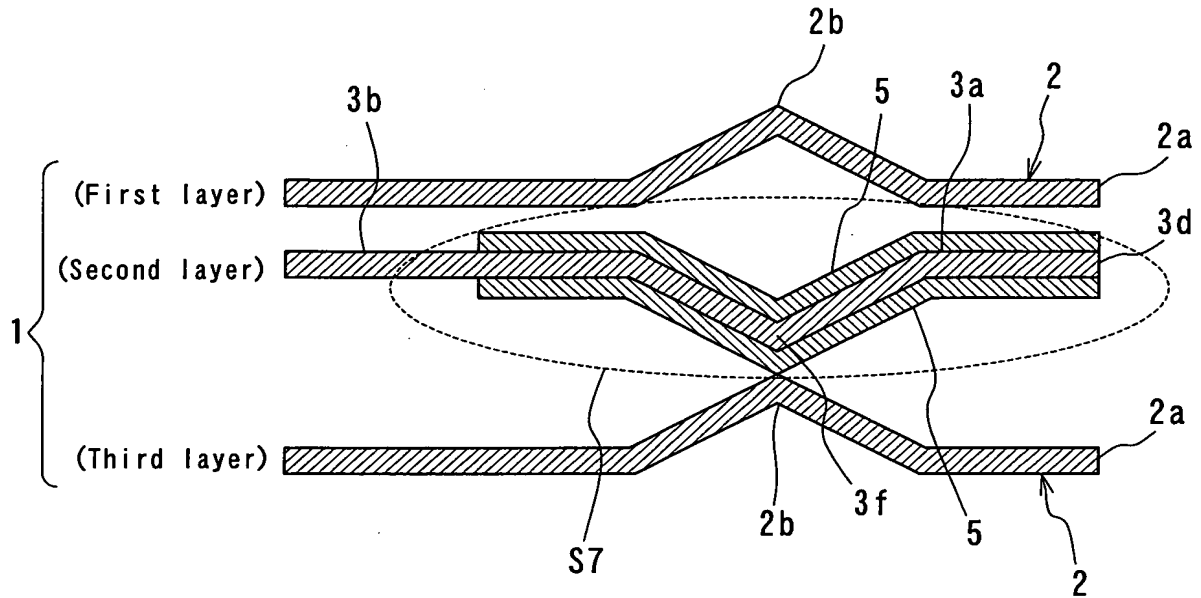


FIG. 7

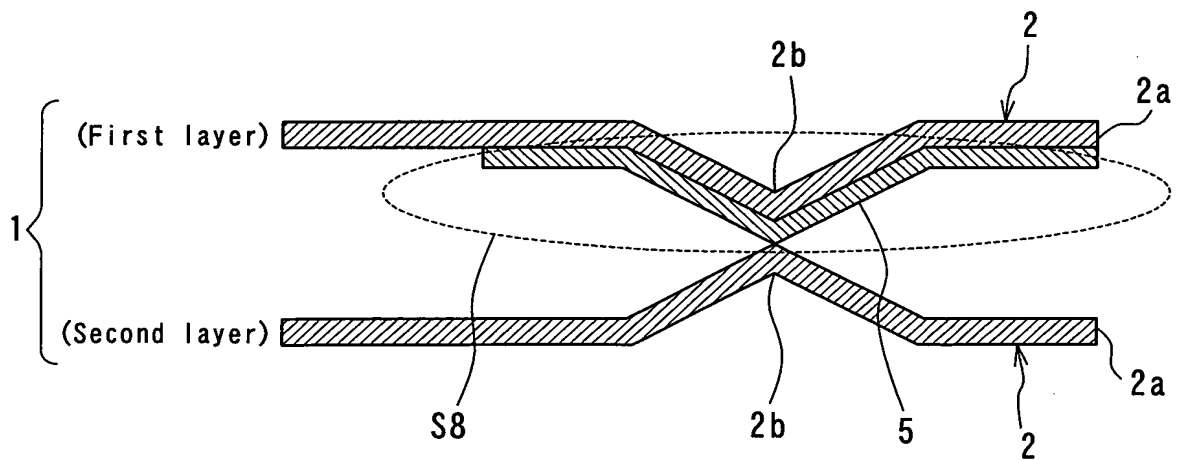

6 / 2 5

FIG. 8



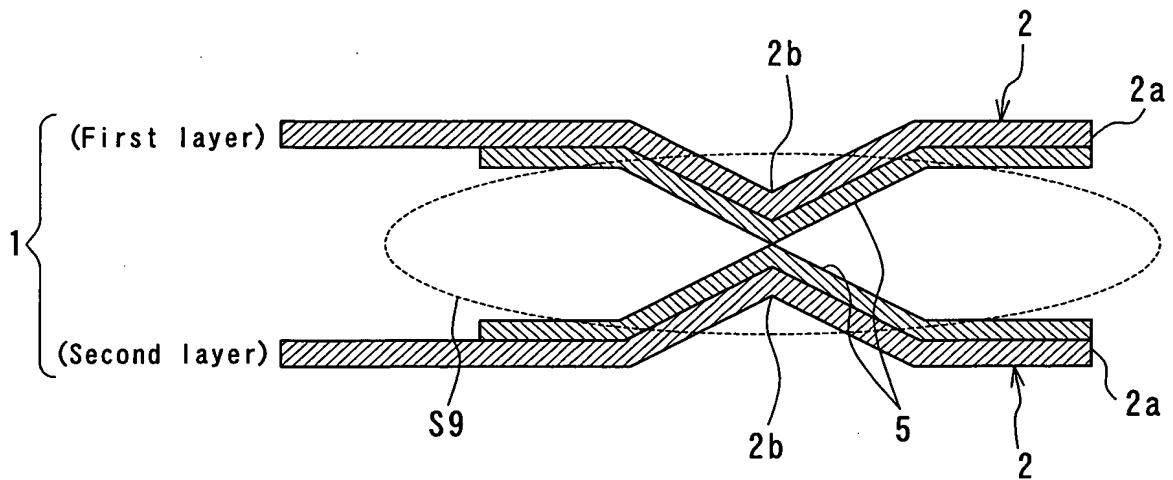


FIG. 9

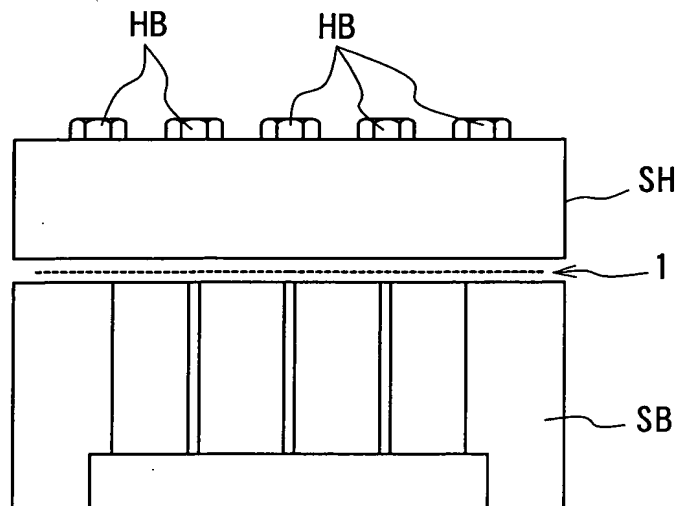

7/25


FIG. 10

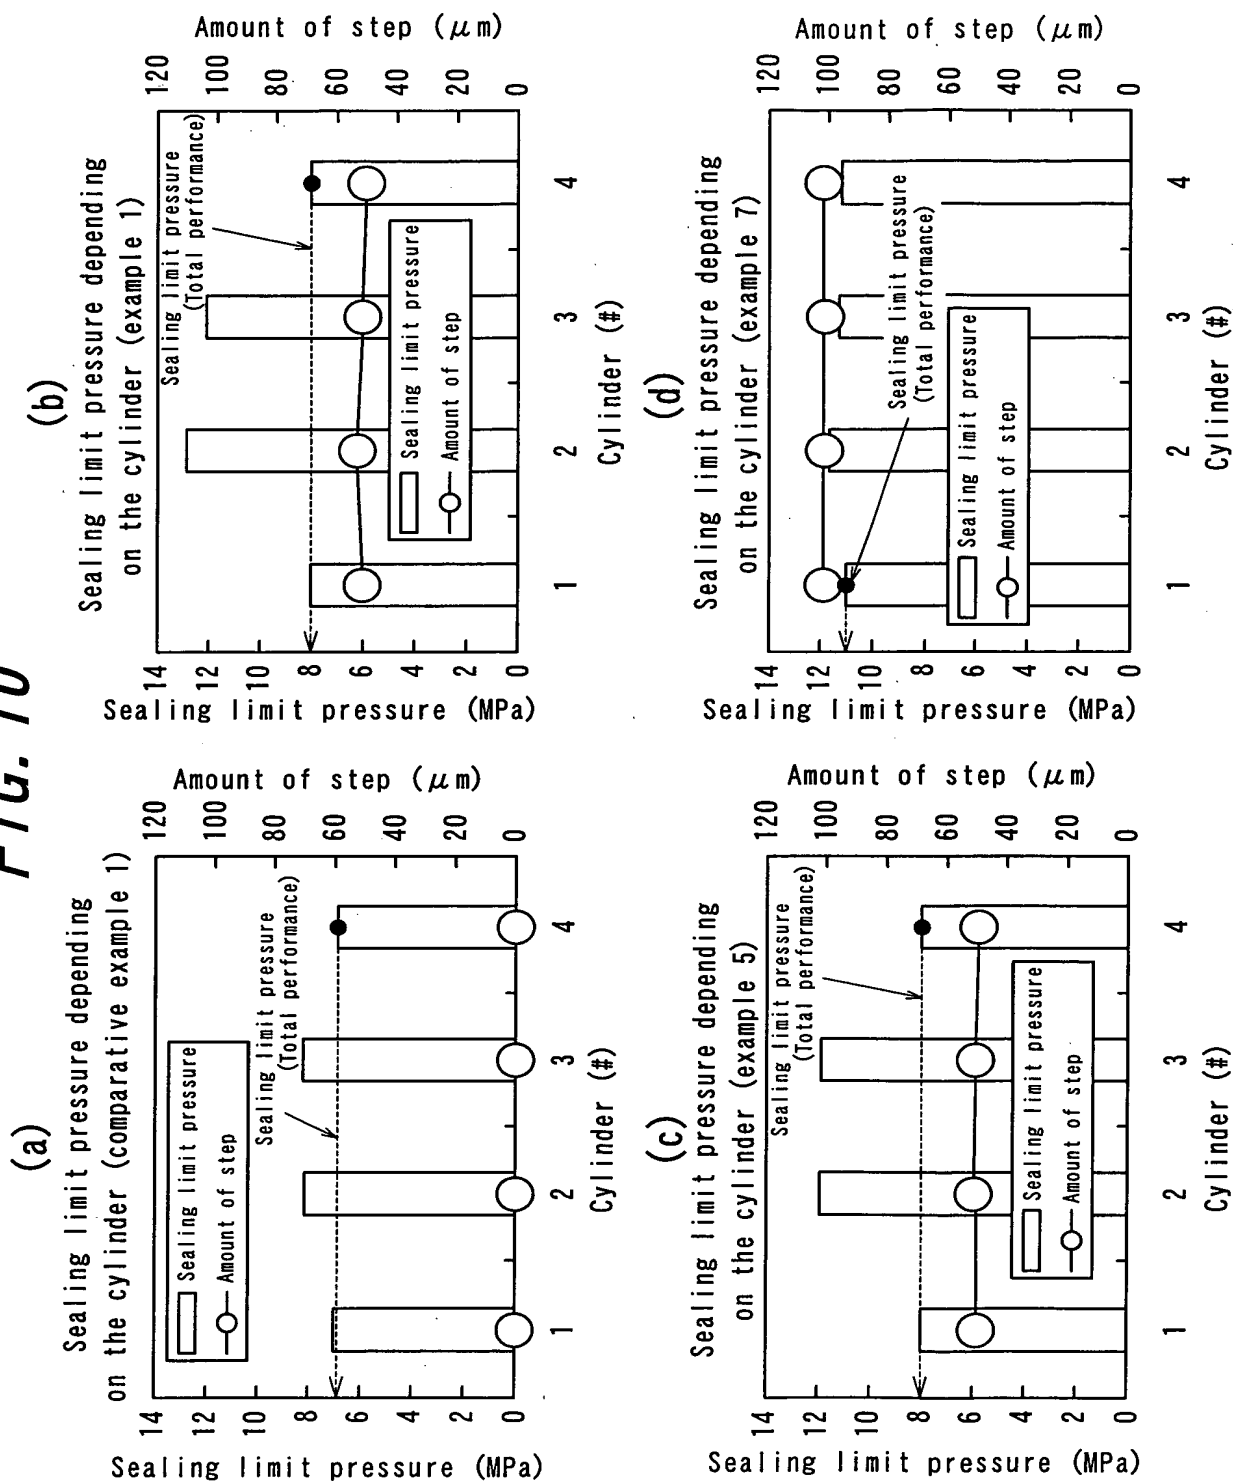


10/550010

8/25

FIG. 11

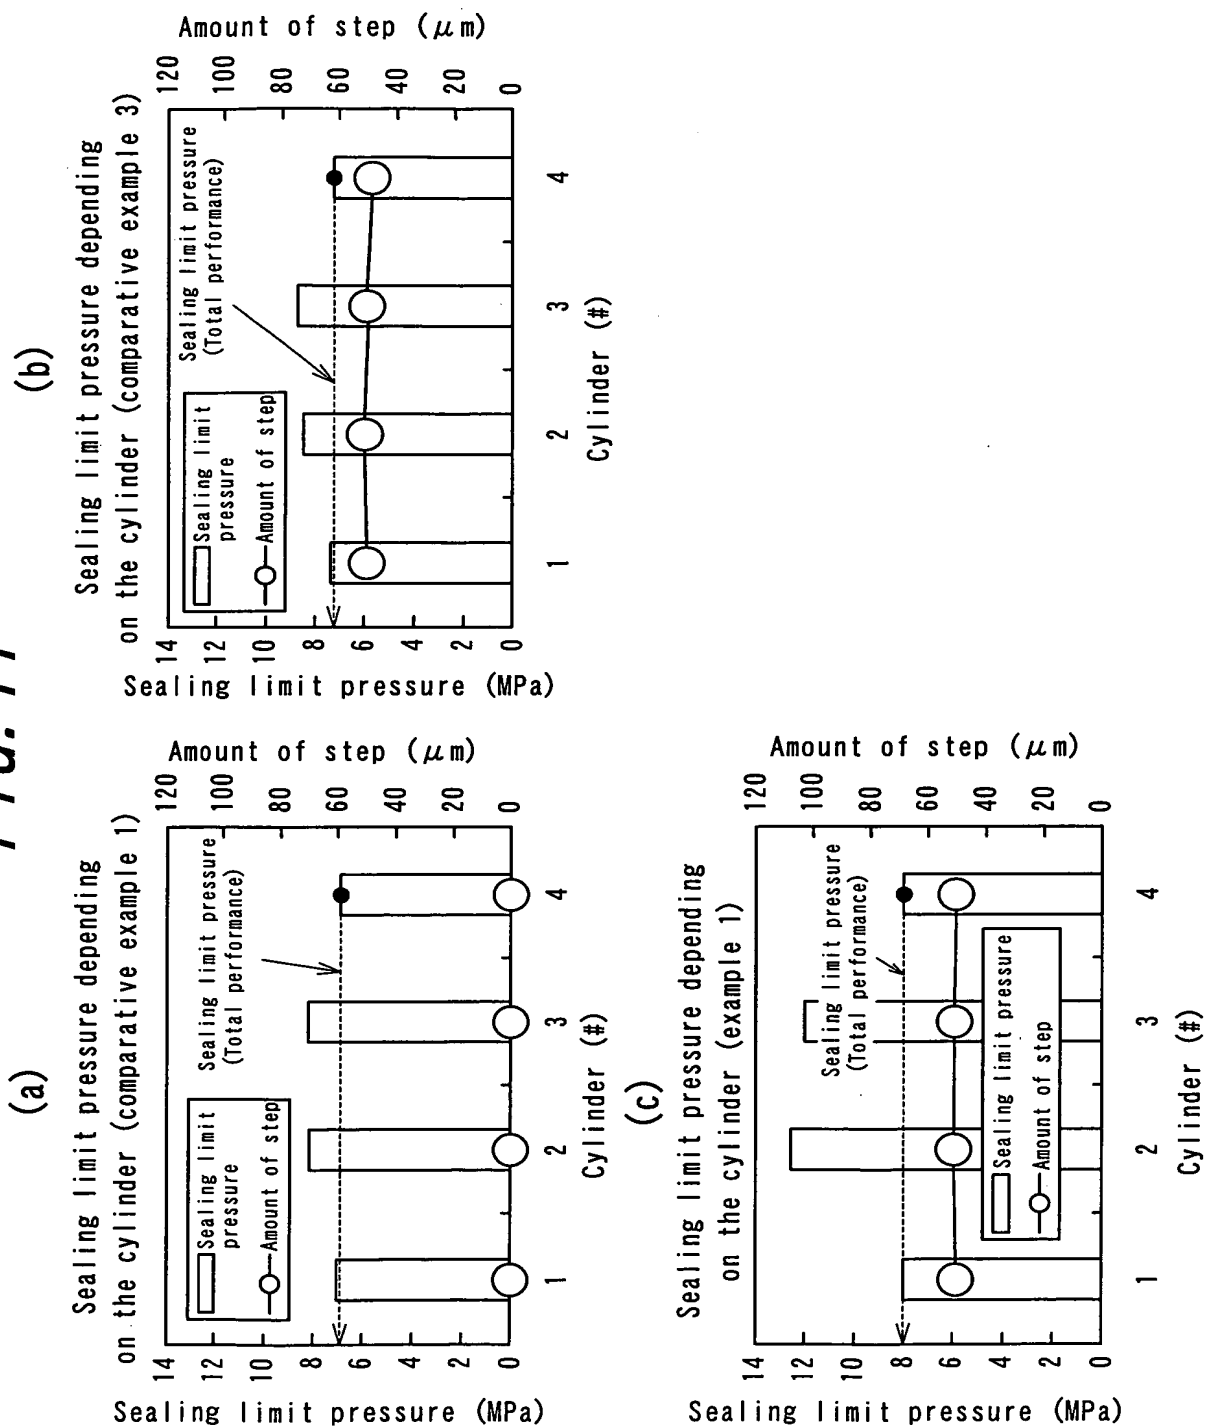

9/25

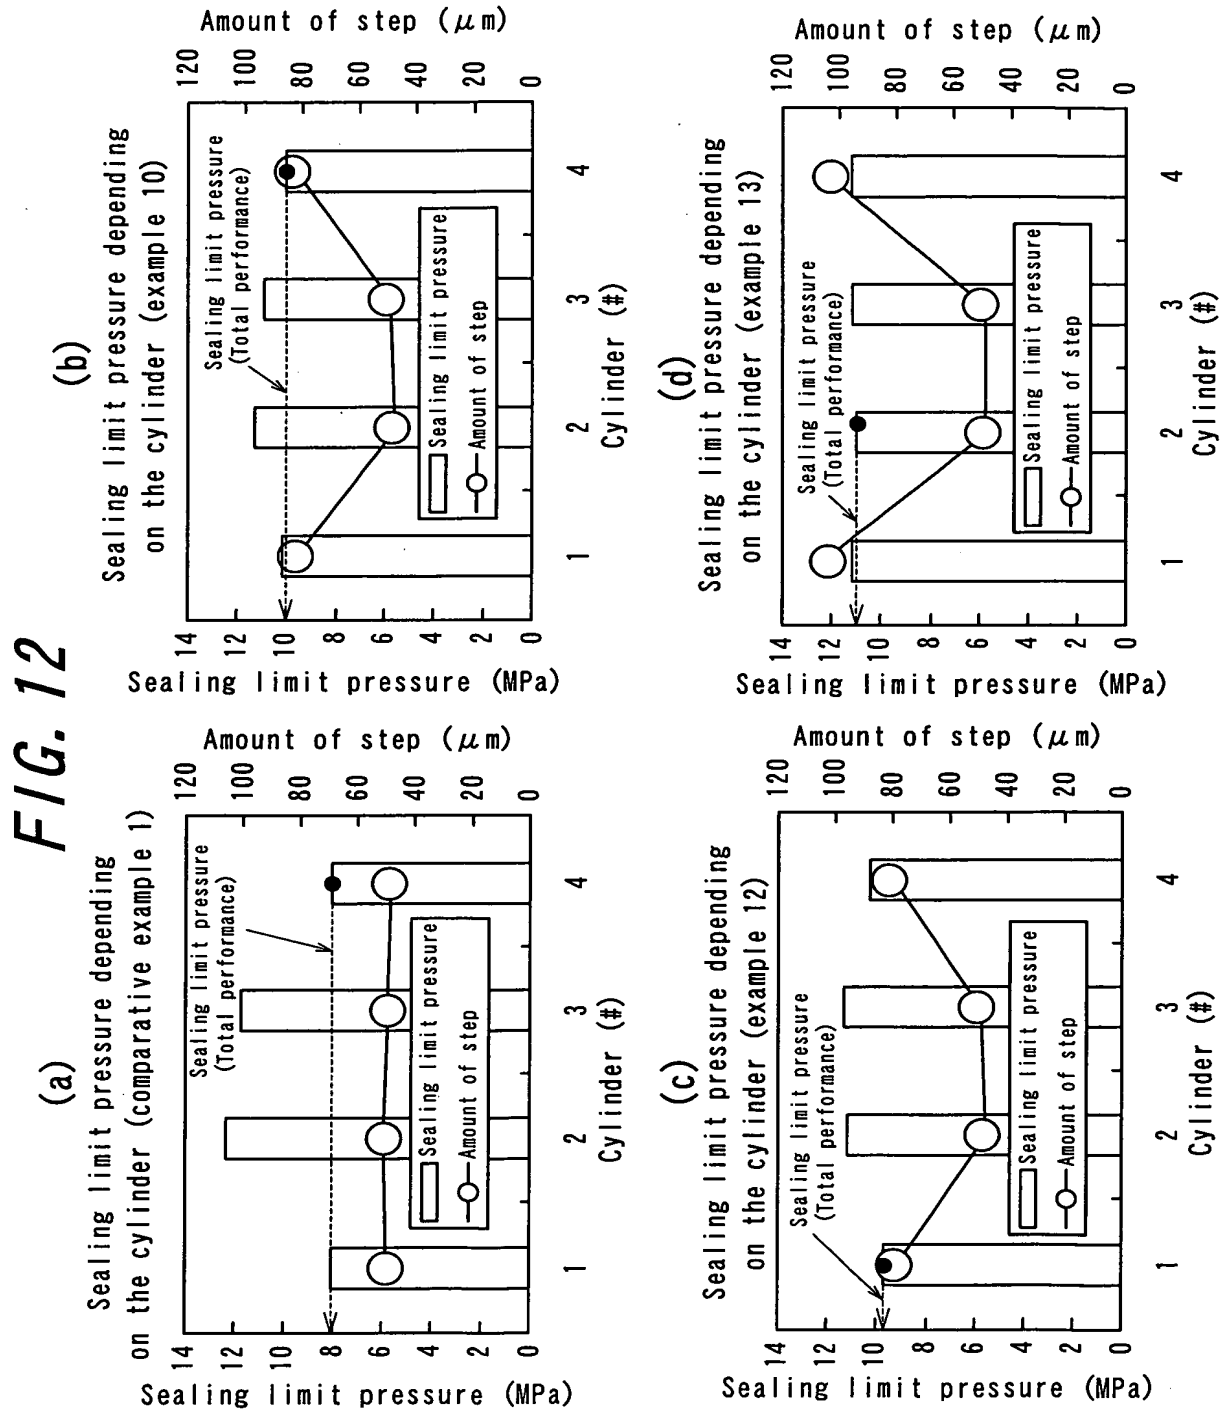

10/550010

10/25

FIG. 13

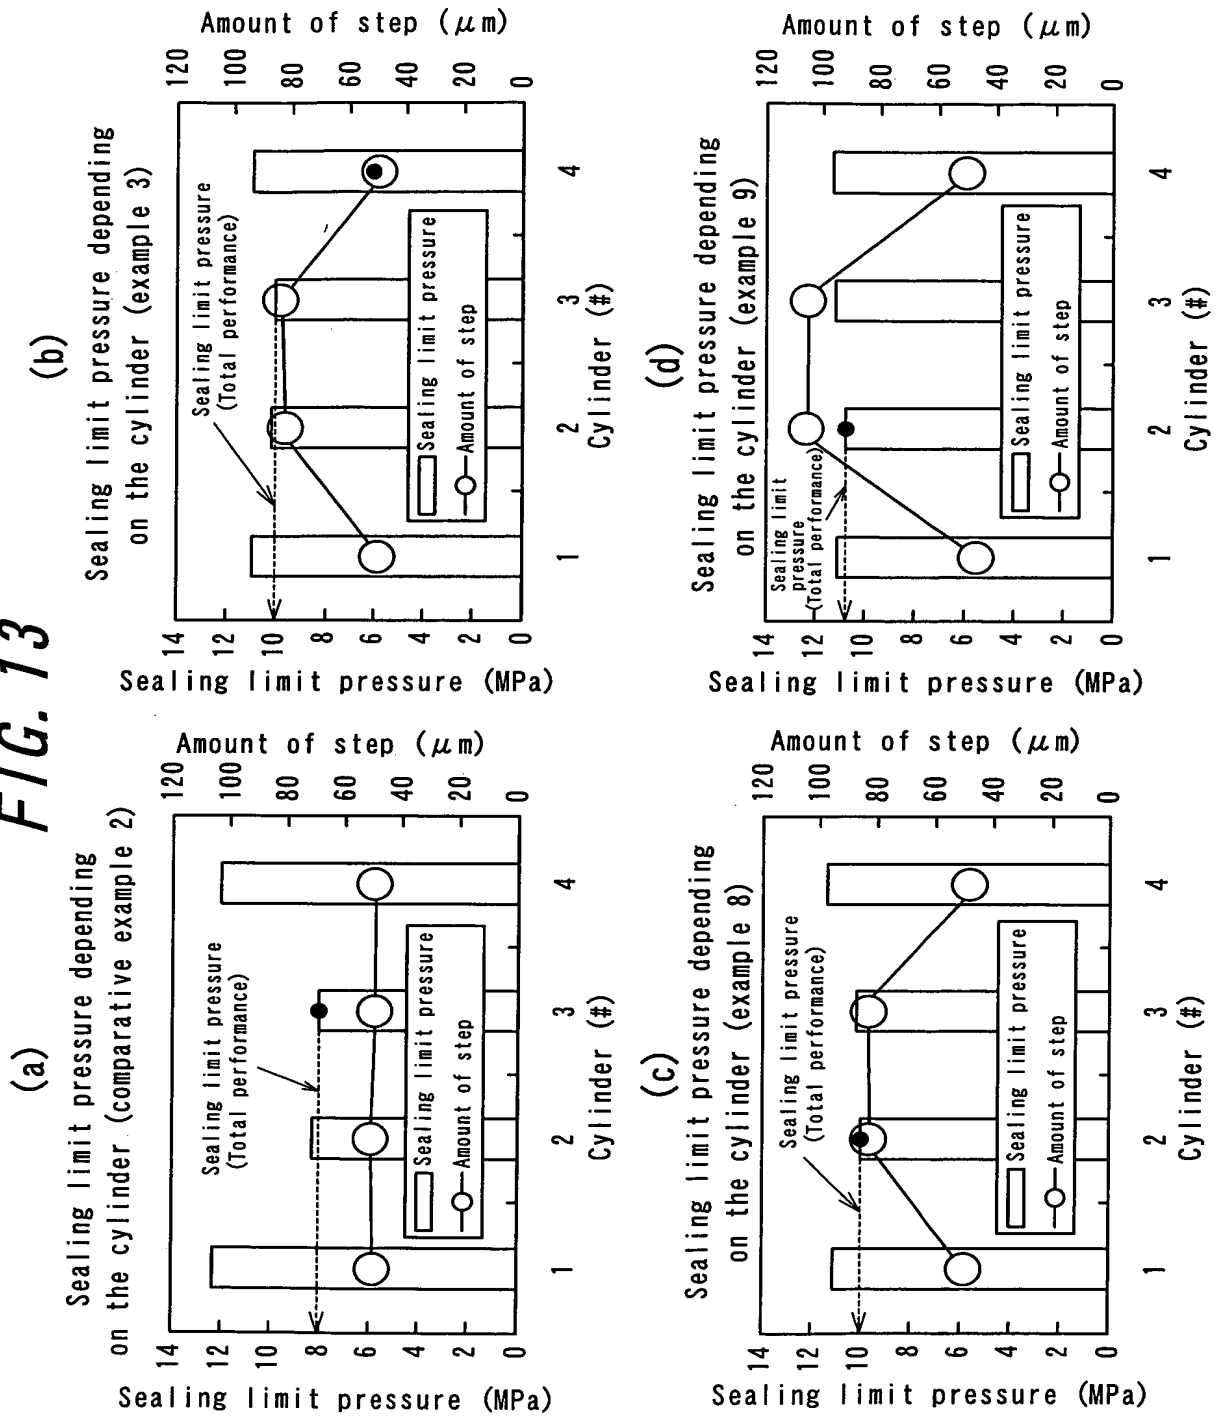


FIG. 14



12/25

FIG. 15


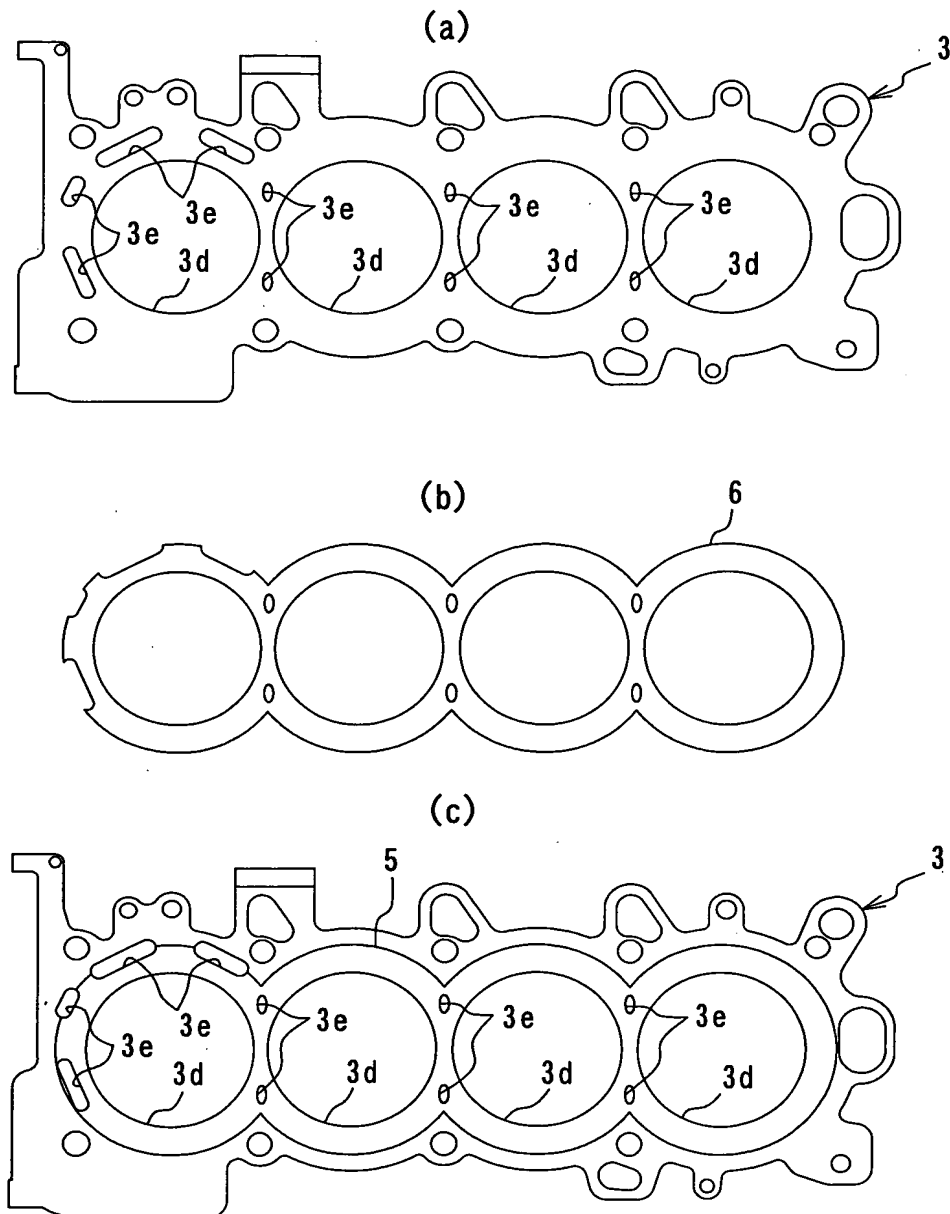


FIG. 16

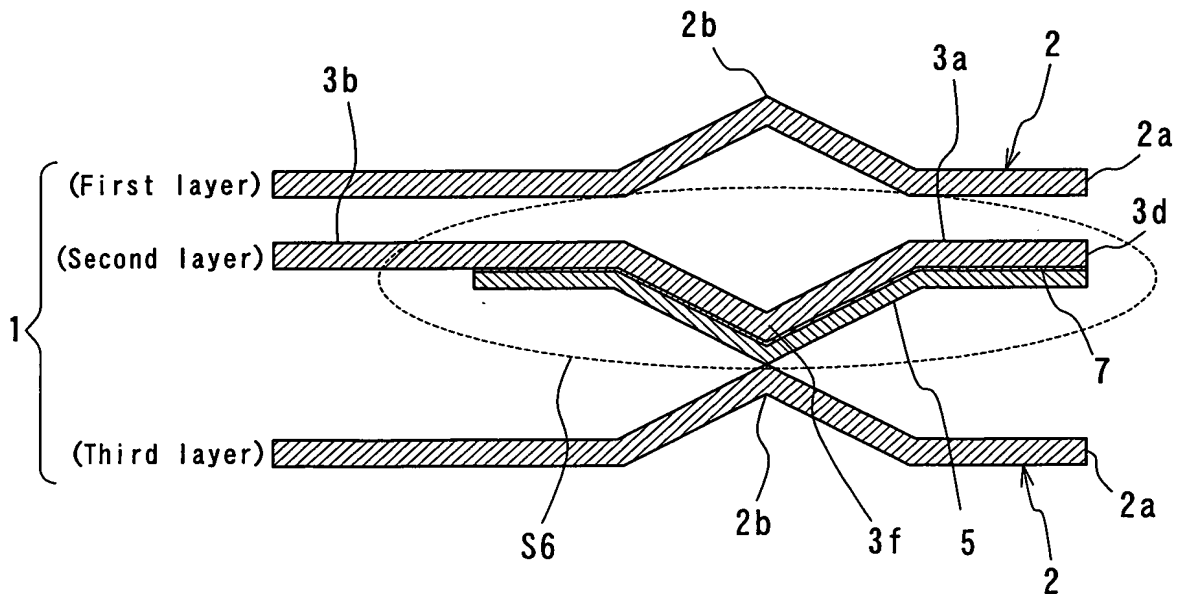

14/25

FIG. 18


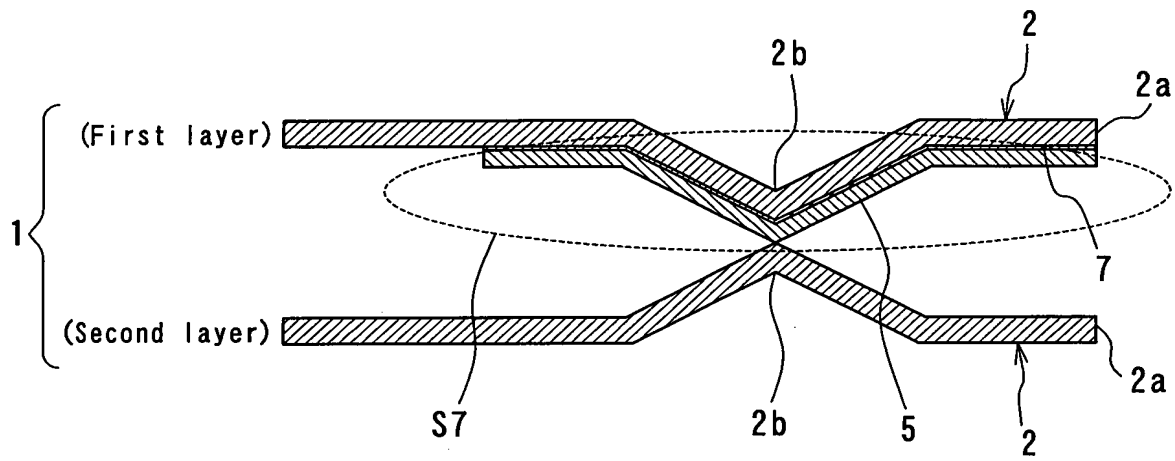



FIG. 19

Sealing properties of cylinder hole portions of cylinder head gasket after 200°C×400hr thermal degradation

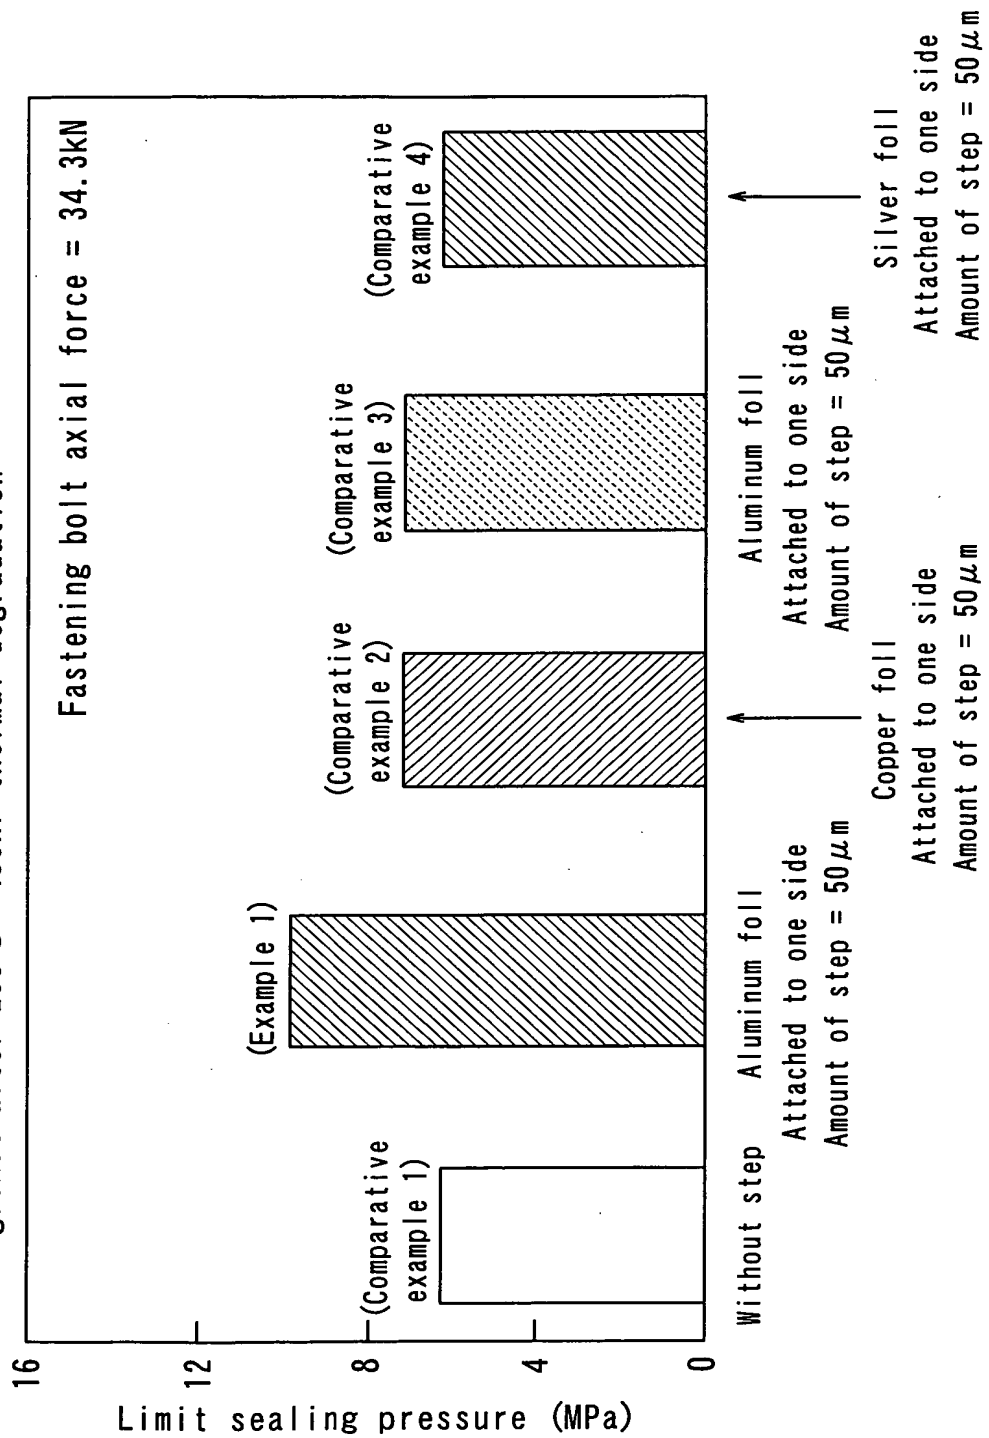

16/25

FIG. 20

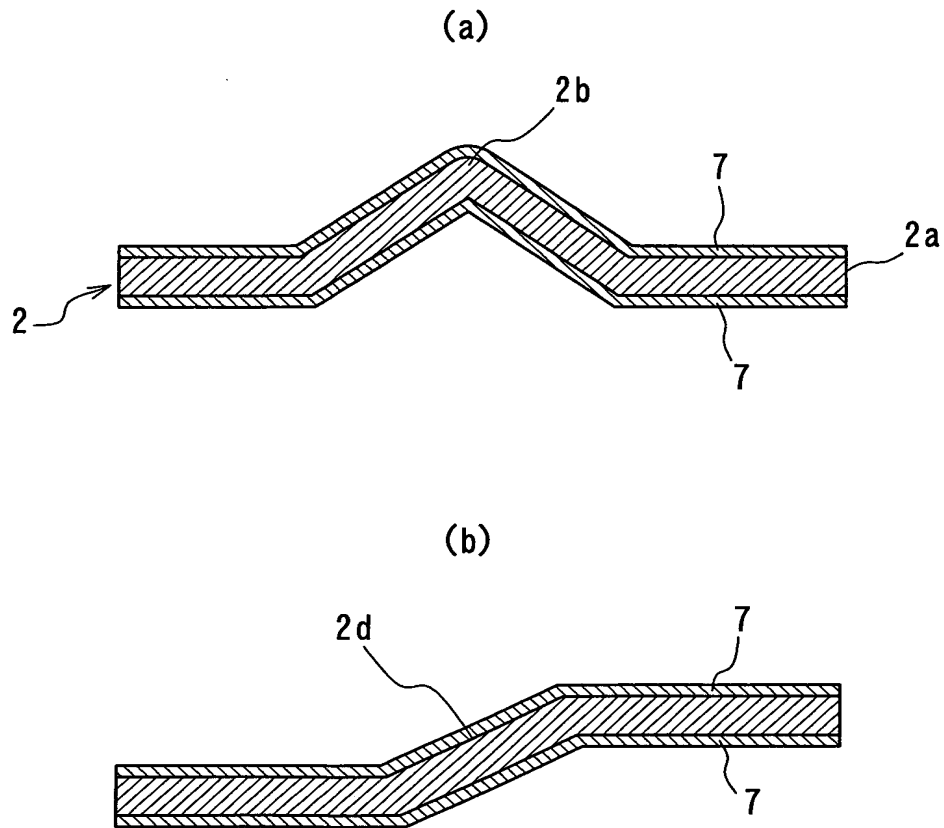

17/25

FIG. 21


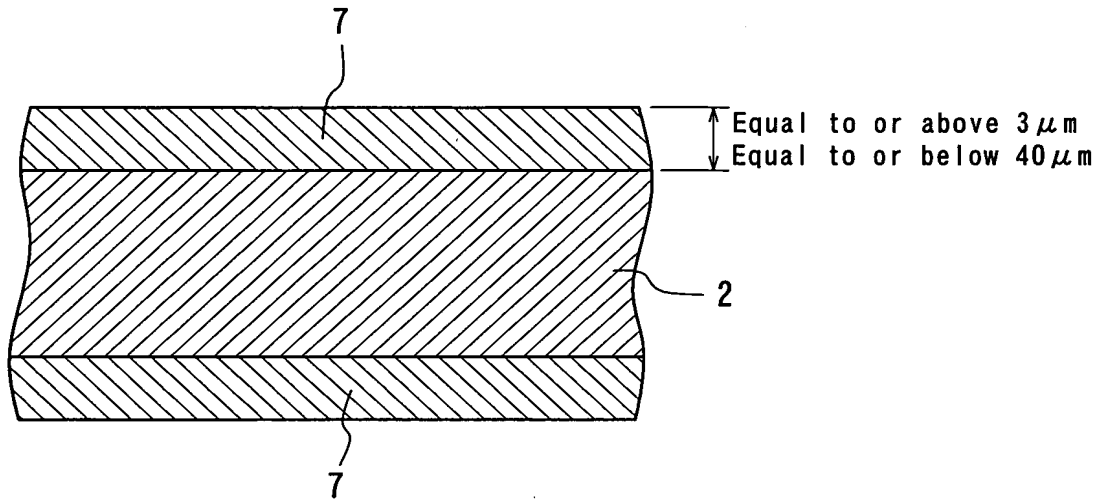


FIG. 22

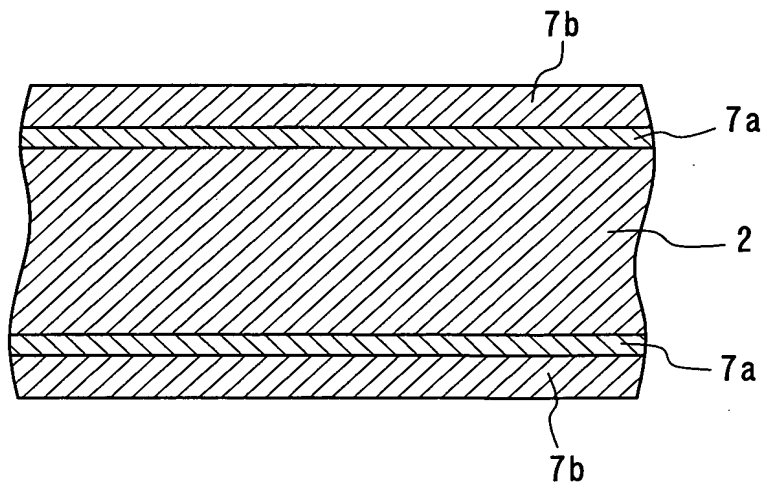


10/550010


18/25

FIG. 23

(a)

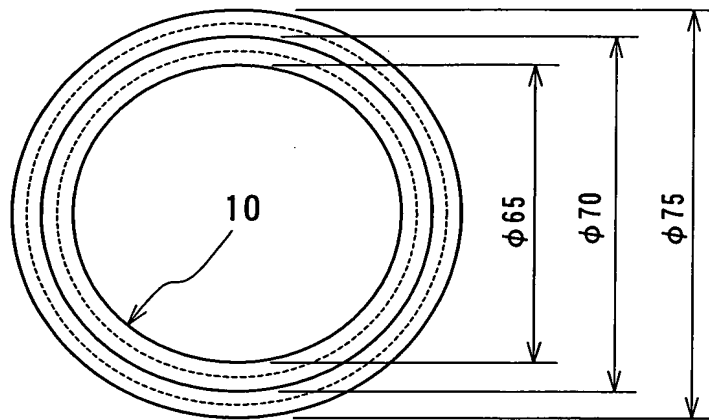


(b)

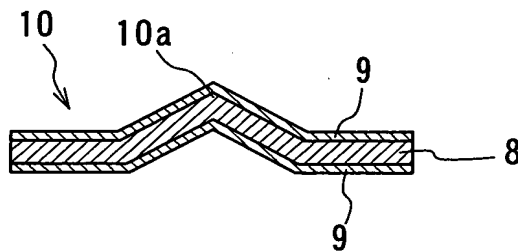


19/25

FIG. 24

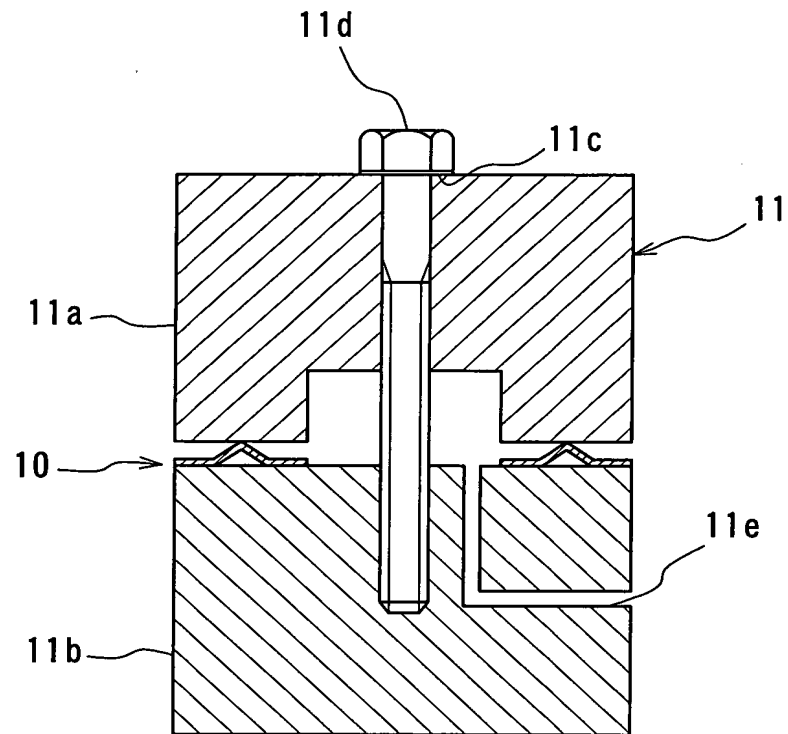

20/25

FIG. 25

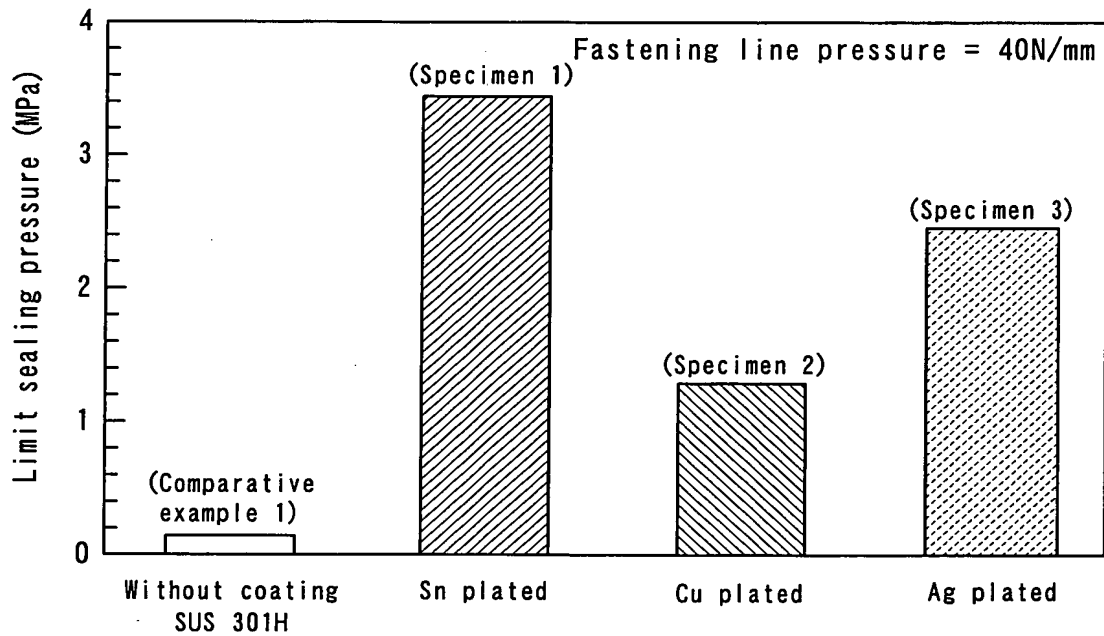

21/25

FIG. 26


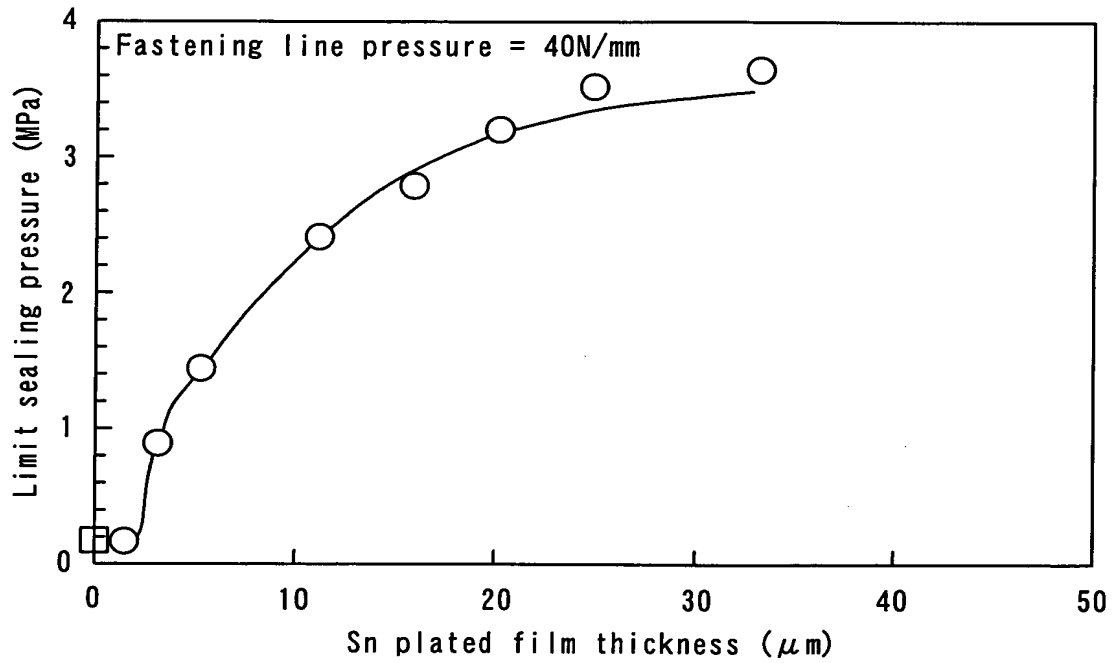


FIG. 27

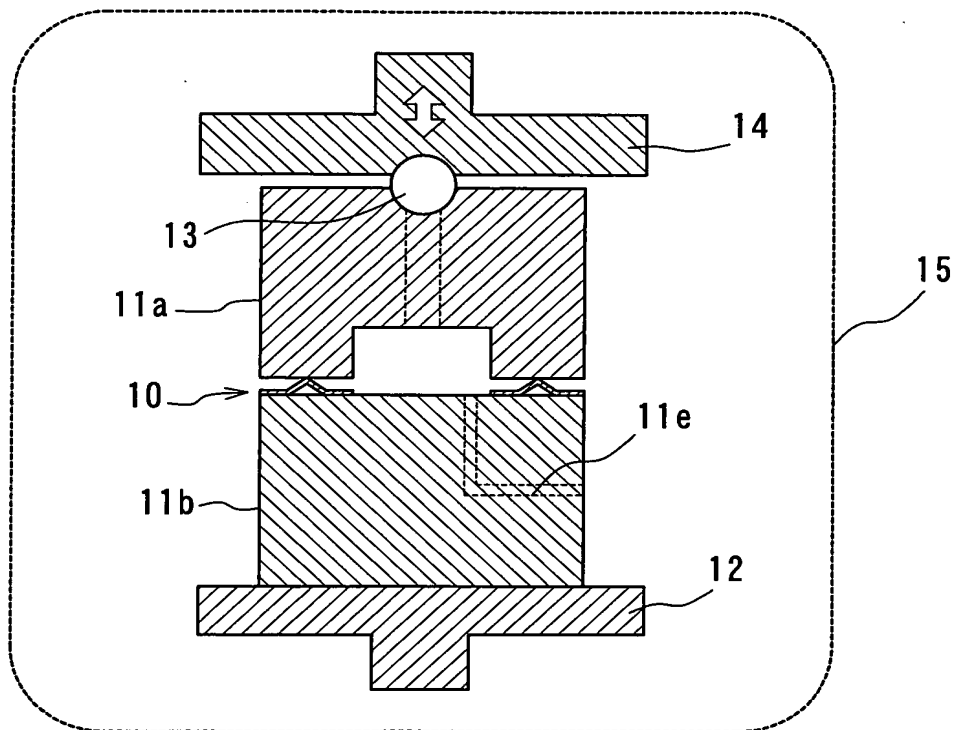

23/25

FIG. 28

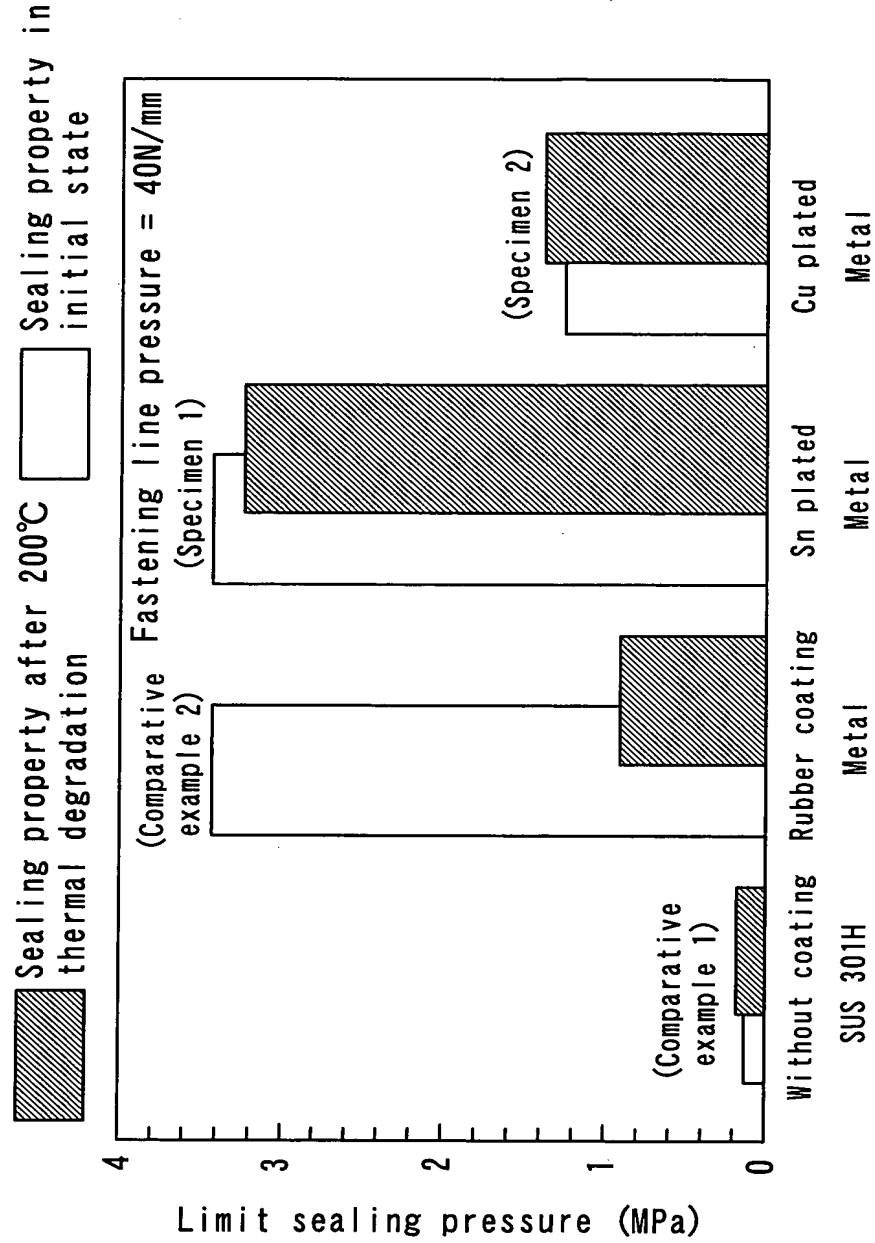


FIG. 29



25/25

FIG. 31

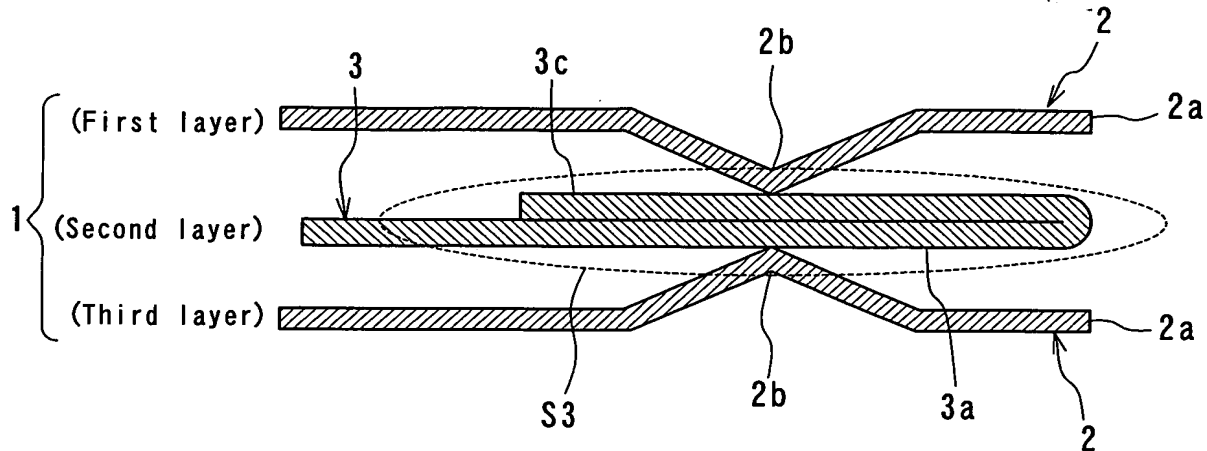


FIG. 32

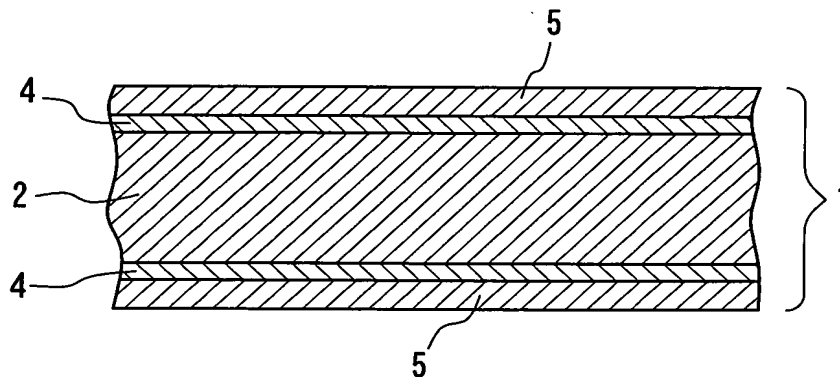


FIG. 33

